


DROPPED WITH CAP PLATE

NON-DROPPED

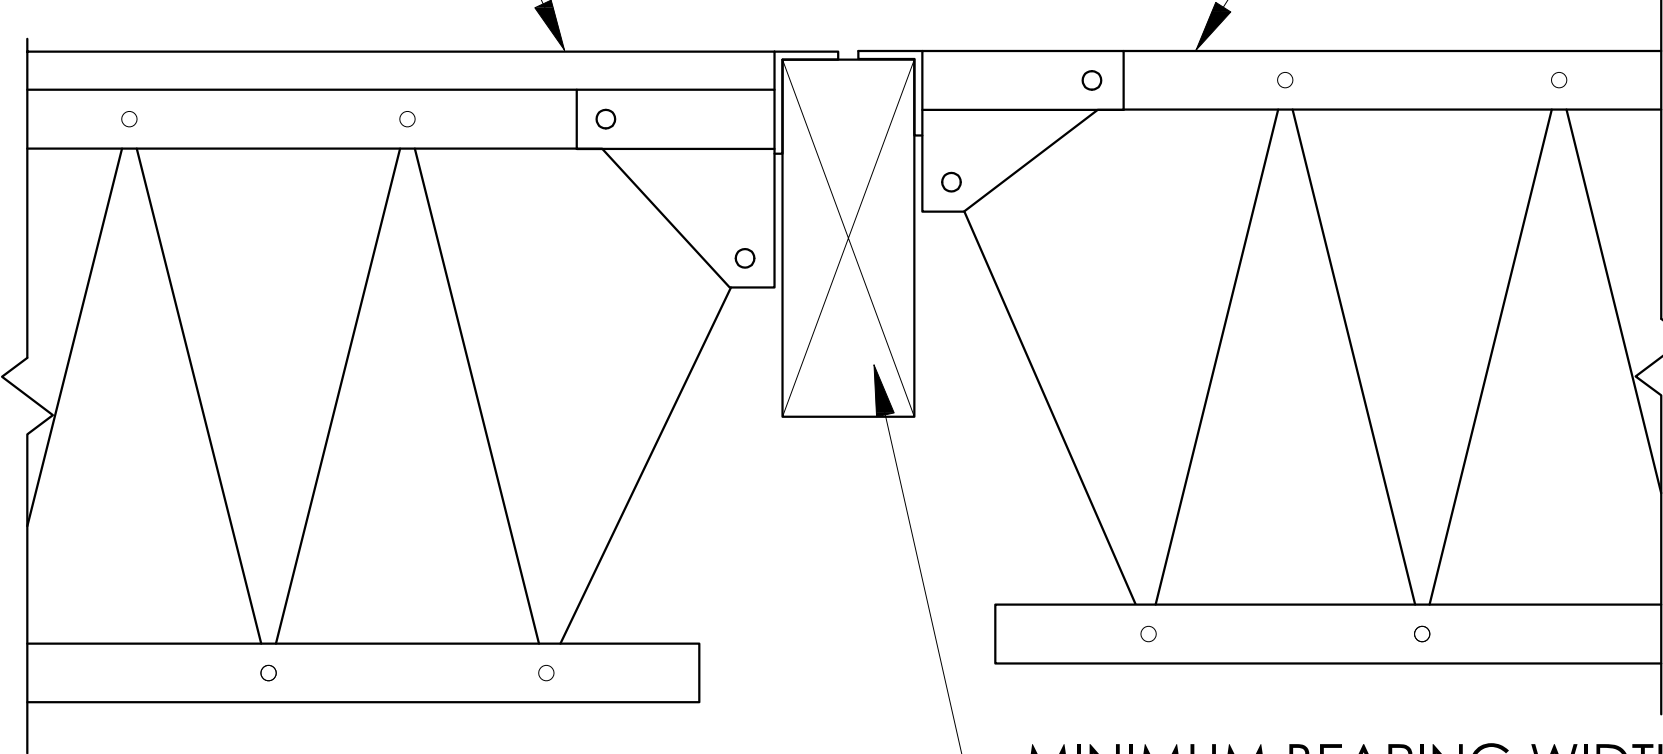

MINIMUM BEARING WIDTH = 5"