


DROPPED WITH CAP PLATE

NON-DROPPED

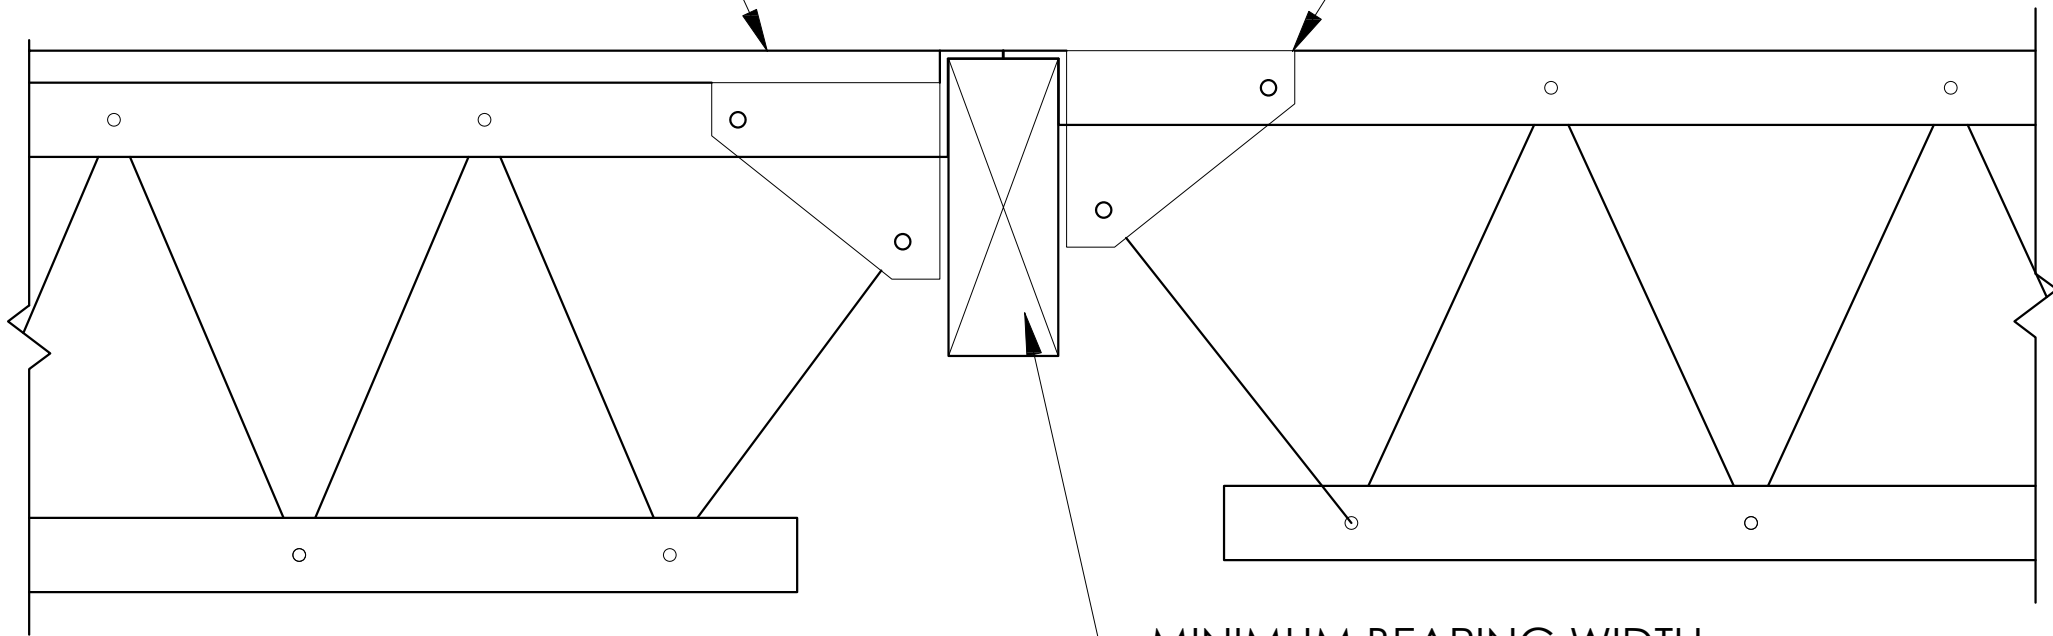

MINIMUM BEARING WIDTH  
RED-M = 7"  
RED-H = 8"